



B-L Series Linear Batwing Diffusers

Batwing distributions for flat-field illumination




Usage Notes:

- B-Lxxx have two different sides. Light should enter the more specularly reflective side, as illustrated in the photos below.
- Bright View B-series diffusers help sculpt light into an efficient linear “batwing” distribution.
- Light distributions are determined by the light source, cavity geometry, and choice of diffuser, and may vary significantly depending on the specific luminaire design.
- Bright View applications engineers can help optimize designs to achieve desired performance.


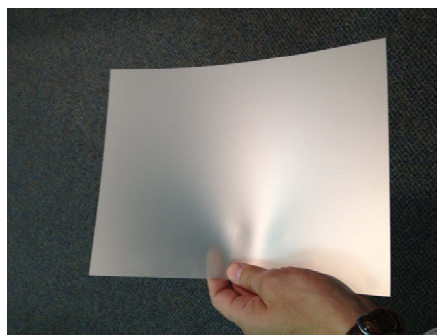



Diffuse Side should face toward viewer (away from light source)

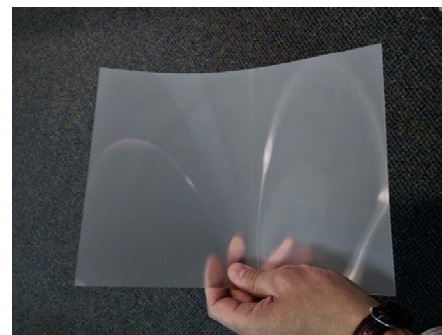


Specularly-reflective side should face toward light source


Example Configurations

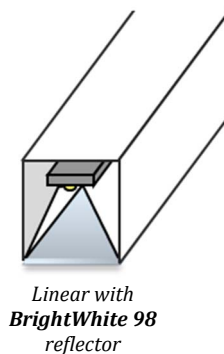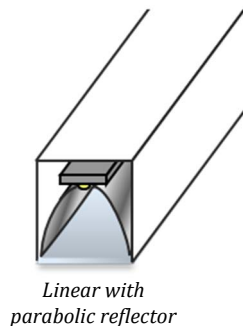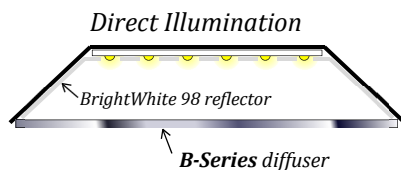

Edge-Lit Panels

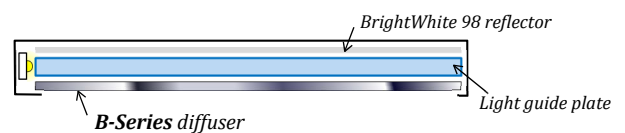

Direct / Indirect Pendant

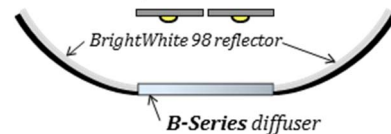

Troffer

